




### 125cc

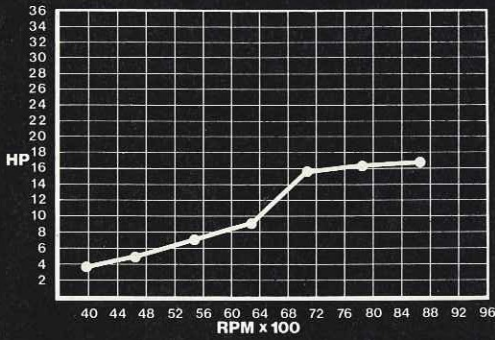

### 175cc

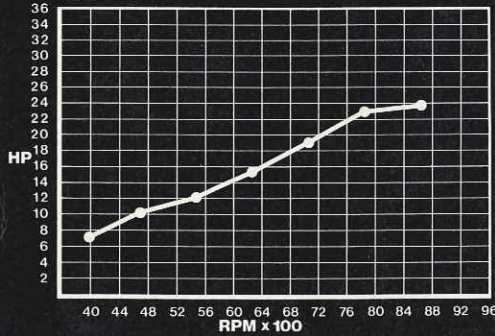

### 250cc

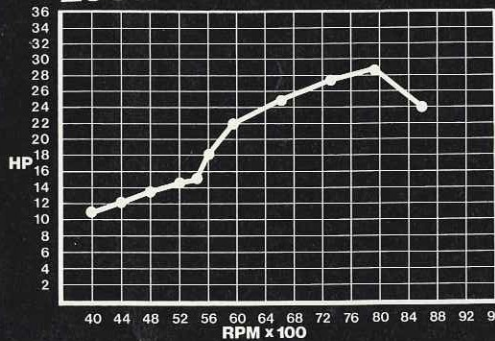

## Specifications :

**125**

**175**

**250**

### DIMENSIONS

Overall height (without mirror) 45"  
 Overall width (without mirror) 34"  
 Seat height 33"  
 Ground clearance 9"  
 Wheelbase 55"  
 Overall length 84"

45"	45"	45"
34"	34"	34"
33"	33"	33"
9"	9"	7"
55"	55"	55"
84"	84"	84"

### CHASSIS

Type  
 Front suspension  
 Rear suspension  
 Fork angle  
 Brake: front/rear  
 Tire: front  
 rear

Tubular double loop space frame with tapered backbone  
 Betor teledraulic 6 1/2" travel  
 Trailing arm, "S. & W." shock absorbers  
 30° ST'D, 25° to 31° adjustment  
 Drum, single leading shoe 6" x 1"  
 3.00 x 21 Trials universal  
 4.00 x 18 Trials universal

Gross weight 257 lbs.  
 Weight (dry) 237 lbs.

257 lbs.	259 lbs.	264 lbs.
237 lbs.	239 lbs.	244 lbs.

### LIQUID CAPACITIES

Gas tank  
 Oil tank  
 Transmission

2.5 U.S. gal. — 2.1 Imp. gal.  
 2.3 U.S. quarts — 1.9 Imp. quarts  
 1.2 U.S. quarts — 1.0 Imp. quart

### ENGINE

Type  
 Bore  
 Stroke  
 Displacement/c.c.  
 Displacement/cu.in.  
 Compression ratio  
 Horsepower at rear wheel  
 Lubrication  
 Starter

Rotary valve / 2 stroke / single cyl. / air cooled		
54mm (2.126")	62mm (2.441")	74mm (2.914")
54mm (2.126")	57.5mm (2.264")	57.5mm (2.264")
123.7cc	173.6cc	247cc
7.54 cu.in.	10.60 cu.in.	15.09 cu.in.
13:1	13:1	13:1
19 @ 8500 rpm	24 @ 8500 rpm	29 @ 8000 rpm
Oil injection, variable volume		
Foot operated left side / in gear starting		

### POWER TRAIN

Primary drive  
 Clutch  
 Transmission  
 Gear ratio

Straight cut & ground gears		
Multi-plate 6 disc / oil bath		5 disc
Constant mesh — 6 speed		5 speed

1st	3.40	3.40	2.91
2nd	2.31	2.31	1.86
3rd	1.68	1.68	1.39
4th	1.31	1.31	1.095
5th	1.095	1.095	0.913
6th	0.96	0.96	
Chain	520	520	520

3.40	3.40	2.91
2.31	2.31	1.86
1.68	1.68	1.39
1.31	1.31	1.095
1.095	1.095	0.913
0.96	0.96	
520	520	520

### CARBURATION

Carburetor type  
 Air filter

Bing 32mm (type V-84)  
 Foam, oil impregnated

### ELECTRICAL

Ignition system  
 Maximum ignition output  
 Maximum alternator output  
 Spark plug type  
 Spark plug number  
 Battery (12 volts)  
 Battery rating

Bosh electronic CDI		
30,000 V	30,000 V	30,000 V
55 W	55 W	55 W
14mm — 3/4" reach		
Champion N57G		
Yuasa 12N5-4B		
5 A/H		



Bombardier Limited manufactures quality recreational vehicles for your year-'round pleasure. Our company strives to design and develop vehicles that will last longer and function smoother, giving you more trouble-free recreational use. Bombardier stands behind its products with an extensive North American dealer network geared to provide top flight after sales parts and service to all our customers.

Play it safe: Wear a helmet, know the law and respect the rights of others.



# Can-am<sup>\*</sup>

## by bombardier

Bombardier Limited reserves the right at any time to discontinue or change specifications, designs, features, models or equipment without incurring obligation.

\*Trademarks of Bombardier Limited. All rights reserved © Bombardier Limited November 1974.

736-019-000

PRINTED IN CANADA